

General Catalogue

House Series


Collection dedicated to values based on elegance and style, to form a decorative link between modern and traditional, enhancing the natural value of materials.

The art of creating balanced compositions in design, color and vitality.

To highlight the essence of ceramic tiles, creating new motifs and designs in harmony with the original material.

Colección dedicada a los valores basados en la elegancia y el estilo, para formar un vínculo decorativo entre lo moderno y lo tradicional, realzando el valor natural de los materiales. El arte de crear composiciones equilibradas en diseño, color y vitalidad.

Para resaltar la esencia de las baldosas cerámicas, creando nuevos motivos y diseños en armonía con el material original.

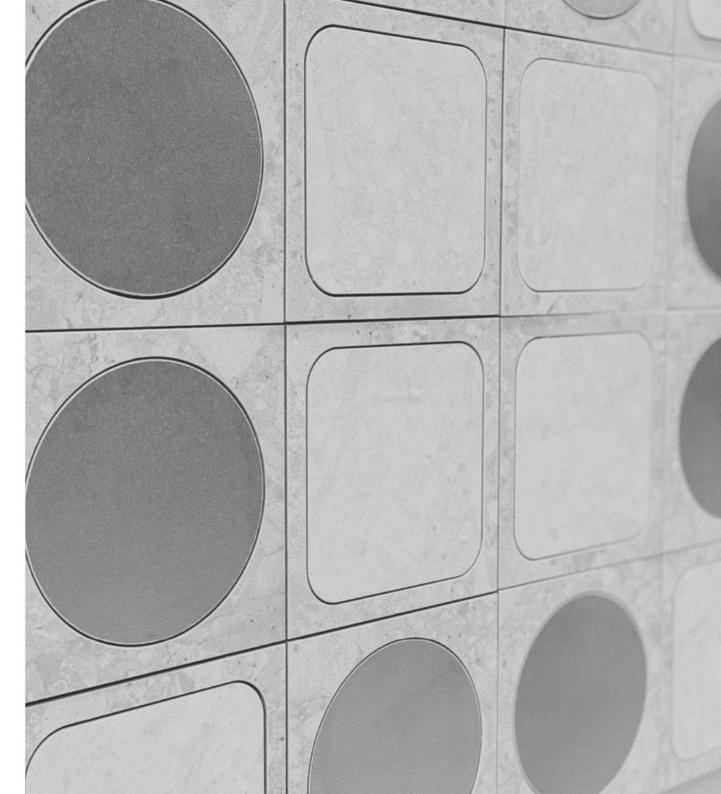

Majestic Collection

House

A combination of geometrically irregular textures in different colors and metallic finishes in 30x30cm size to generate a marked three-dimensional effect. On a background of cementitious appearance, we appreciate the traces of metal that provide color and a touch of craftsmanship and differentiation within a regular and orderly set.

Una combinación de texturas geométricamente irregulares en diferentes colores y acabados metalizados en formato 30x30cm para generar un marcado efecto tridimensional. Sobre un fondo de apariencia cementosa, apreciamos los trazos del metal que aportan color y un toque artesanal y diferenciador dentro de un conjunto regular y ordenado.





House

Porcelain tile / Gres porcelánico Thickness: 9mm (0,35") / Espesor: 9mm Rectified / Rectificado

> 30x30 cm 12"x12"

Natural Finish / Acabado Mate
Wallcovering use / Revestimiento de paredes
Indoor & outdoor / Interior y exterior





Technical Data

Laying advice

1. Choosing a ceramic tile

When choosing a ceramic tile to cover a certain surface, attention must be paid to a series of aesthetical (color, design, texture, etc.) and technical (physical-chemical features, etc.) conditions. The technical factors for an adequate choice will depend on the specific situation, weather conditions in region, and expected use. The ceramic pieces contained in this catalog are decorated with a thin metal application. Manipulate with special care. Improper handling (scratching and/or scraping) and improper use of abrasive detergents can damage the pieces. Treat these in particular with extreme careful.

These products are not suitable for wet areas like public spas or swimming pools where aggressive saline and/or disinfectant products like bleach are used.

2.Initial verification

Prior to placing the ceramic tile, the client should check that it is in agreement with the requested features (model, quality, shape, tone, gage, etc.). If any ceramic piece is defective, do not use and communicate this to your provider. Not accept any claims once placed the product.

3. Lay out

It is recommended that the layout of the product is prepared be- fore the final installation. The surface for placing the tiles must be flat, firm, stable, compatible with the binding material, and clean.

We recommend using cement glue with polymeric additives as fit-ting material. Recommended product: **H40 (Kerakoll)**

Before preparing the binding material, check the manufacturer's indications (way to use, etc).

The bonding materials are applied with a notched trowel to ensure optimal distribution across the surface. Should be avoided that the residues of fitting material get dry, remaining adhered on the surface of pieces, using a slightly damp sponge to clean the tile joints, passing it diagonally across them. Do not use dirty or brackish water.

4. Jointing

For technical reasons, it is not advisable to lay ceramic tiles with- out the corresponding layout joint.

For choosing the jointing material, one should take into account the place where the tiles (floor or wall) are fitted and their situation (indoor or outdoor), the use of joints with polymeric additives or synthetic resins being recommendable, and not Portland cement grout.

Recommended product: Fugalite / Fugabella (Kerakoll)

5.Cleaning

Do not use commercial products known as cement removers or scale removers, acid solutions used mainly to remove cement debris (work debris).

For cleaning excess installation materials before they have dried, use a sponge and plenty of water.

For subsequent cleanings we recommend the use of a soap damp-ened in water and neutral soap. Do not use powder detergents, nor metallic mops or abrasives. Do not use abrasive, acidic or alkaline cleaning products. Use a soft sponge with liquid soap and water to clean the tiles, and then dry them with a fine cloth.

Recommended product: Fuga Soap (Kerakoll)

Uses complete list

	Indoc	is outd	oots wall	¢100	, light traffic	nedium tro	El Mall	ei ^{lloot}	Purcondensation at his party of the condensation of the condensati
SERIE									
Abstra	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Rake	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
House	\checkmark	/	\checkmark			\checkmark		\checkmark	
Framed	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Mist	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
2Lines	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Slate	\checkmark	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	
Urban	\checkmark	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	
Artic	√	\checkmark	√	\checkmark		\checkmark	√		
Fusion	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	
Tempo	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	
Jurgen	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Metrik	\checkmark		\checkmark			\checkmark		\checkmark	
Kondo	\checkmark		\checkmark			\checkmark		\checkmark	
Trames	√		√			√		\checkmark	_
2Moreone	\checkmark		\checkmark			\checkmark		\checkmark	
Cottage	\checkmark		\checkmark			\checkmark		\checkmark	
Become	\checkmark		\checkmark			\checkmark		\checkmark	
2Geom	\checkmark		\checkmark			\checkmark		\checkmark	
Cosmos	\checkmark		\checkmark			\checkmark		\checkmark	

@INTHETILE

Inthetile, S.L. Pol. Ind. UII Fondo C/ Navelina - Nave 9 12539 Les Alqueries (Castellón) - España

+34 964 200 652 info@inthetile.com www.inthetile.com

